



Glass Door Coolers

G648BMF-HC / G1.2YBM2F-HC / SG1.9L3-HC

Features

- * Exterior - heavy duty painted steel
- * Interior - white painted aluminium, stainless steel 304 inner floor
- * ETL Safety, ETL Sanitation approved
- * CFC free refrigerant and foam
- * Danfoss / Embraco compressor
- * Ventilated, automatic defrosting and evaporation of condensation water
- * ebm fans, cold air circulation is strongly forced by fan to enable quick refrigeration effect and balanced temperature
- * Fluorescent light
- * Digital temperature controller : Carel or Dixell
- * Round interior corners for easy cleaning
- * Self-closing glass door fitted with easy to clean, replaceable magnetic balloon gaskets
- * PVC coated adjustable shelves
- * Fixed strip for price tags
- * Castors with brake

Options

- * Adjustable legs
- * Additional shelving/shelf brackets





Glass Door Coolers

G648BMF-HC / G1.2YBM2F-HC / SG1.9L3-HC





G648BMF-HC
Swing Door



G1.2YBM2F-HC
Sliding Door



SG1.9L3-HC
Swing Door

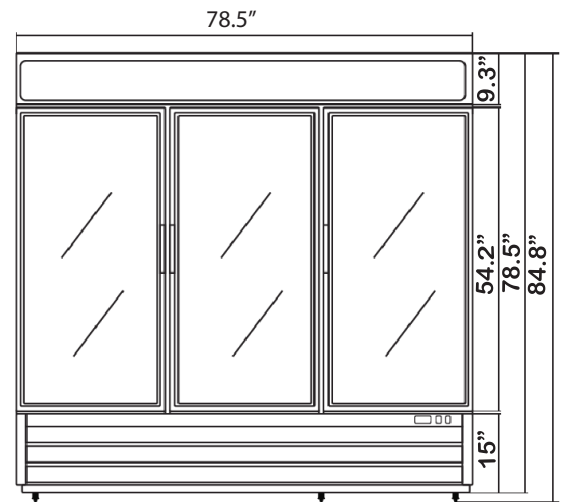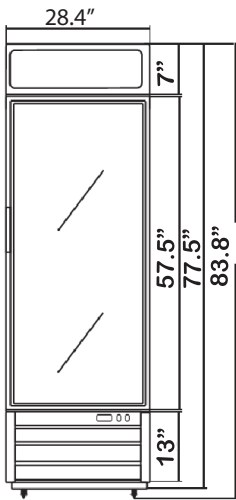

MODEL NUMBER	EXTERNAL DIMS (IN) W X D X H	VOLTAGE / FREQUENCY	AMPS (A)	NET WEIGHT (LBS)	INPUT POWER (W)	TEMPERATURE RANGE (°C)
G648BMF-HC	28.4 x 32 x 83.8	115 V / 60 HZ	3.0	320	315	0 - 5
G1.2YBM2F-HC	53.1 x 32 x 84	115 V / 60 HZ	4.5	437	479	0 - 5
SG1.9L3-HC	78.5 x 30.2 x 84.8	115 V / 60 HZ	10.7	615	617	0 - 5

* Specifications are subject to change without notice.

**All measurements are approximates.

***All equipment designed to operate in controlled environment below 75°F (+24°C) temperature and HR 55% relative humidity